



MODEL: **A2300N**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
4.56m³

BODY DIMENSION

External length	2300mm
External width	1800mm
External height	1460mm
Internal length	2140mm
Internal width	1640mm
Internal height	1300mm
Pallet loading	1 Pallet capacity

Fitted body weight *450kg

PANELS THICKNESS

Roof/floor	80mm
Front wall	80mm
Side walls/rear doors	80mm

Side door	Passenger side single door 1300 x 600mm
Rear door	Double - (left opens first)
Front wall frame	Universal to suit off engine drive units
Side step	Optional
Rear step	Powdercoated rear light assembly bar
Cargo track	Optional
Floor	One piece aluminium ricegrain
Internal light	1 LED sensor light
Refrigeration	Thermo King SV400





Thermal efficiency 'K' VALUE .37 W/m²K tested to Australian Standard AS4982

Standard Inclusions

Model No: A2300N-BCEI

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED lights
- Moulded plastic mud guards
- Options available to suit customer requirements

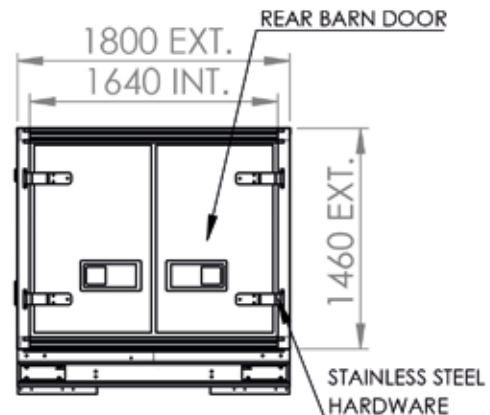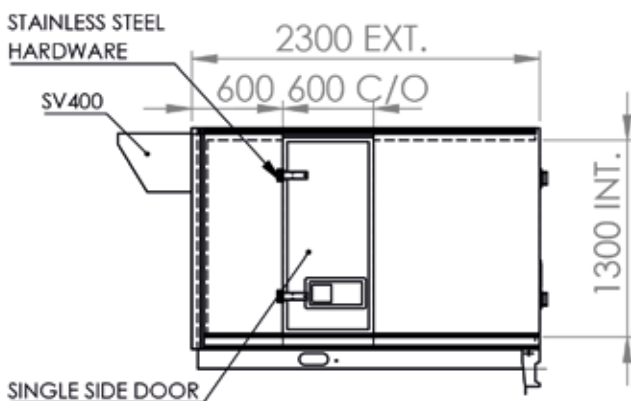

TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.12.2017). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added.