



MODEL: **CMX-IMP-L-4600 BARN**

THERMAXX LOADMAXX

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Cubic Capacity
22.77m³

BODY DIMENSION

External length	4600mm
External width	2300mm
Internal height	2200mm
Pallet loading	3 pallet capacity


Approx body weight 990kg

PANEL THICKNESS

Roof	Polyester translucent with internal reinforcement Omega shaped
Front/side walls	14mm plywood with galvanised kickplate

Floor wood	18mm Wisa Hexa Plywood floor (3 pieces)
Rear frame	Galvanised, white painted rear frame
Rear door	30mm sandwich panel barn door with PCV seals. Recessed stainless steel locks and stainless steel hinges
Sub frame	Hibrid subframe without longitudinal beams
Tie rails	3 tie rails

Note: All bodies that require a chassis extension to comply with RMS will be an additional charge based on chassis type, cost and engineer certification

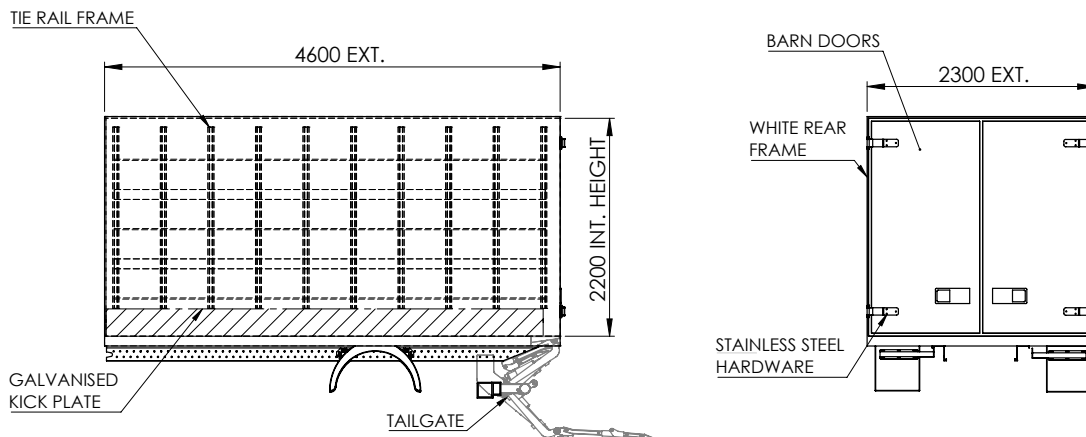

TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (21.05.2018). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added.