



MODEL: **A4060N**

**THERMAXX** ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity  
**-20°C\***

Cubic Capacity  
**14.57m<sup>3</sup>**

#### BODY DIMENSION

External length	4060mm
External width	2180mm
External height	2050mm
Internal length	3900mm
Internal width	2020mm
Internal height	1850mm
Pallet loading	3 Pallet capacity

**Fitted body weight** \*1177kg

#### PANELS THICKNESS

Roof/floor	100mm
Front/side wall	80mm
Rear/side doors	80mm

Side door	Passenger side single door 1850 x 800mm
Rear door	Triple - (centre opens first)
Front wall frame	Universal to suit off engine drive units
Side step	Fixed rung step
Rear step	Fixed plank step
Cargo track	1 recessed row @ 900mm 1 shoring bar
Floor	One piece aluminium ricegrain
Internal light	1 LED sensor light
Refrigeration	*Thermo King SV-400





Thermal efficiency 'K' VALUE .37 W/m<sup>2</sup>K tested to Australian Standard AS4982

## Standard Inclusions

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor light
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Options available to suit customer requirements

**Model No: A4060N-ACEHI**

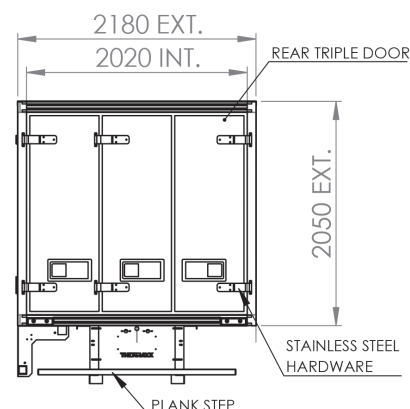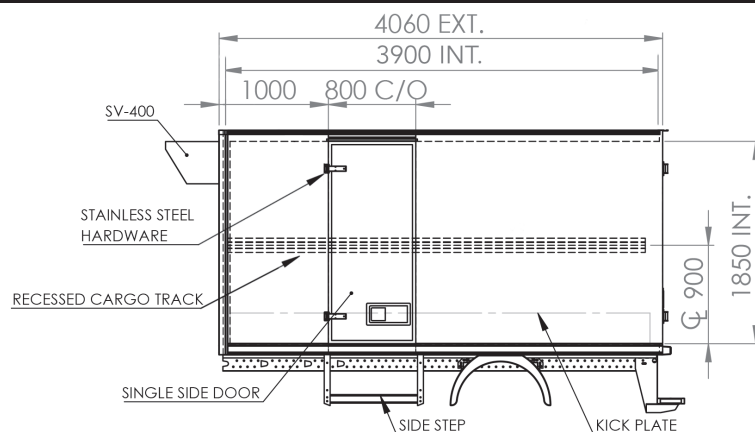

TRS/Thermamaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the ThermoMaxx product. Please note: TRS/Thermamaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.3.2023). \*Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4-year warranty is for the ThermoMaxx Advantage products only. \*20°C is based on an average ambient temperature. Note this can fluctuate depending on the region travelling and time of year - also the amount of door opening per day.