



MODEL: **A7800P**

**THERMAXX** ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity  
-20°C\*

Cubic Capacity  
44.99m<sup>3</sup>

#### BODY DIMENSION

|                 |                    |
|-----------------|--------------------|
| External length | 7800mm             |
| External width  | 2490mm             |
| External height | 2650mm             |
| Internal length | 7620mm             |
| Internal width  | 2410mm             |
| Internal height | 2450mm             |
| Pallet loading  | 12 Pallet capacity |

**Fitted body weight** \*2964kg

#### PANELS THICKNESS

|            |       |
|------------|-------|
| Roof/floor | 100mm |
| Front wall | 100mm |
| Side walls | 40mm  |
| Rear doors | 80mm  |

|                  |  |
|------------------|--|
| Side door        | N/A  |
| Rear door        | Double (left opens first)                      |
| Front wall frame | Universal to suit diesel drive units           |
| Side step        | N/A  |
| Rear step        | Heavy duty crash bar                           |
| Cargo track      | 2 recessed rows @ 800-1400mm<br>2 shoring bars |
| Floor            | One piece aluminium ricegrain                  |
| Internal light   | 3 LED sensor lights                            |
| Refrigeration    | *Thermo King T-1000R                           |




Thermal efficiency 'K' VALUE .55 W/m<sup>2</sup>K tested to Australian Standard AS4982

## Standard Inclusions

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops

## Model No: A7800P-BEHI

- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

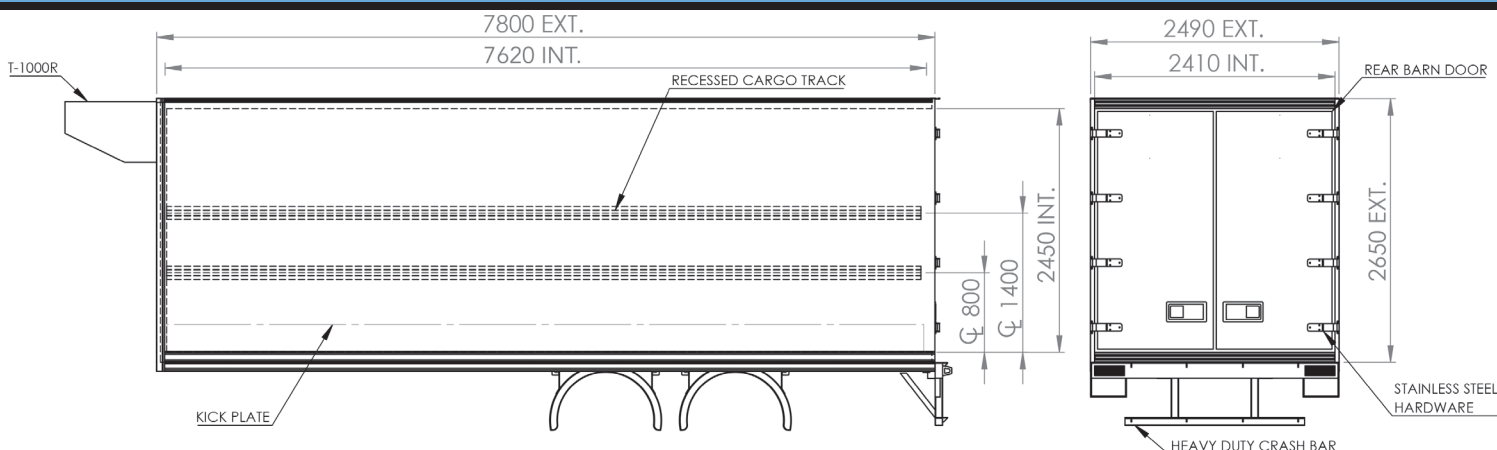

TRS/Thermamaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermamaxx product. Please note: TRS/Thermamaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.3.2023). \*Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4-year warranty is for the Thermamaxx Advantage products only. \*20°C is based on an average ambient temperature. Note this can fluctuate depending on the region travelling and time of year - also the amount of door opening per day.