



MODEL: **A7850P**

**THERMAXX** ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity  
**-20°C\***

Cubic Capacity  
**44.99m<sup>3</sup>**

#### BODY DIMENSION

External length	7850mm
External width	2490mm
External height	2650mm
Internal length	7620mm
Internal width	2410mm
Internal height	2450mm
Pallet loading	12 Pallet capacity

**Fitted body weight** \*3218kg

#### PANELS THICKNESS

Roof/floor	100mm
Front wall	100mm
Side walls/side doors	40mm

Side door	N/A
Rear door	65mm freezer rated roller shutter door with galvanised frame
Front wall frame	Universal to suit diesel drive units
Side step	N/A
Rear step	Heavy duty crash bar
Cargo track	2 recessed rows @ 800-1400mm 2 shoring bars
Floor	One piece aluminium ricegrain
Internal light	3 LED sensor lights
Refrigeration	*Thermo King T-1000R




Thermal efficiency 'K' VALUE .64 W/m<sup>2</sup>K tested to Australian Standard AS4982

### Standard Inclusions

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals on roller door
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements
- Heavy duty galvanised rear door frame

### Model No: A7850P-EHO

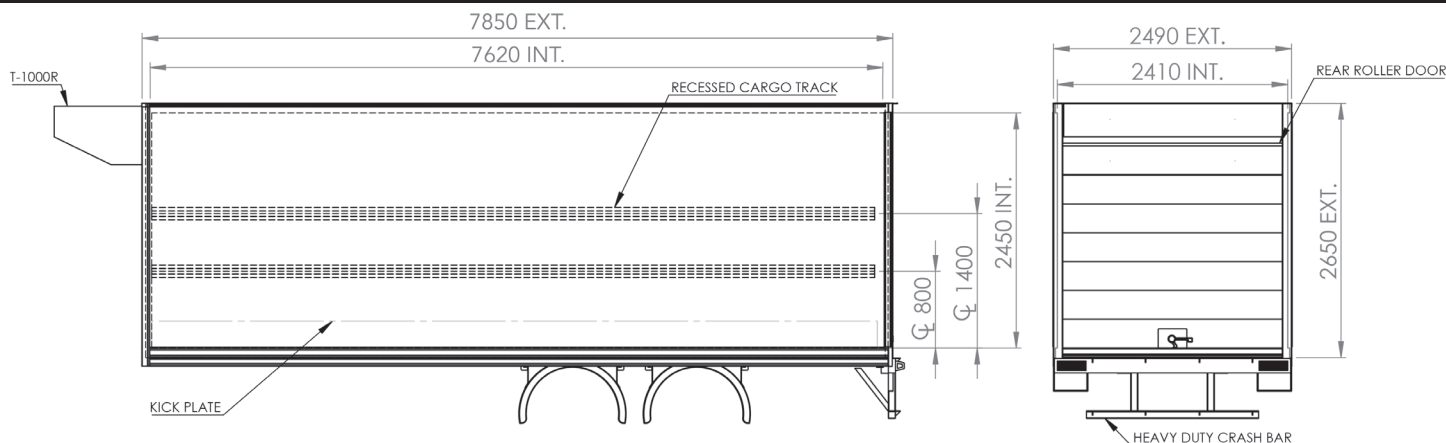

TRS/Thermacx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermacx product. Please note: TRS/Thermacx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.3.2023). \*Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4-year warranty is for the Thermacx Advantage products only. \*20°C is based on an average ambient temperature. Note this can fluctuate depending on the region travelling and time of year - also the amount of door opening per day.